


MicroLubricant ML-605
*High Performance Tube Bending
 Lubricant*

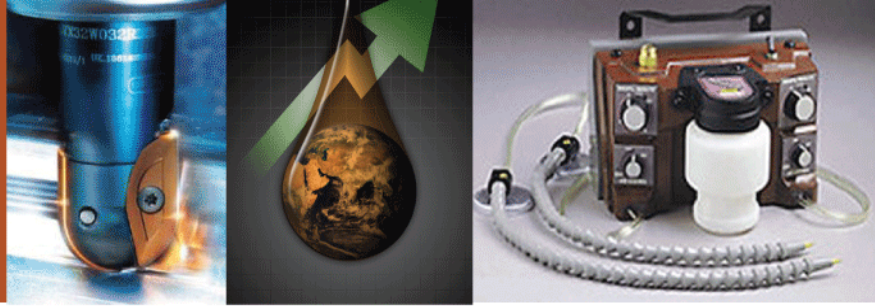

Product Description


Micro Lubrication, now that's... **Clever.**

MicroLubricant ML-605 is a specially formulated synthetic tube bending lubricant that provides maximum barrier lubrication and film forming technologies for light to heavy-duty bending and forming of steel, stainless steel, aluminized tubes and pipes of all sizes.

MicroLubricant ML-605 is used as received, and it is typically applied with an adjustable applicator that providing a high strength micro-layer of lubricant on the mandrel and ID of the tube that is extremely effective at reducing friction and increasing tool life. It is designed to stay where it is applied to eliminate drips associated with conventional lubricants, and due to the fact it does not contain any mineral oil, it burns cleanly and does not need to be cleaned off prior to welding or assembly.

Product Benefits

- No Build Up on Mandrel Over Time
- Reduces Friction and Increases Tool Life
- Designed to Stay Where it is Applied
- Doesn't Need to be Cleaned Off Before Welding

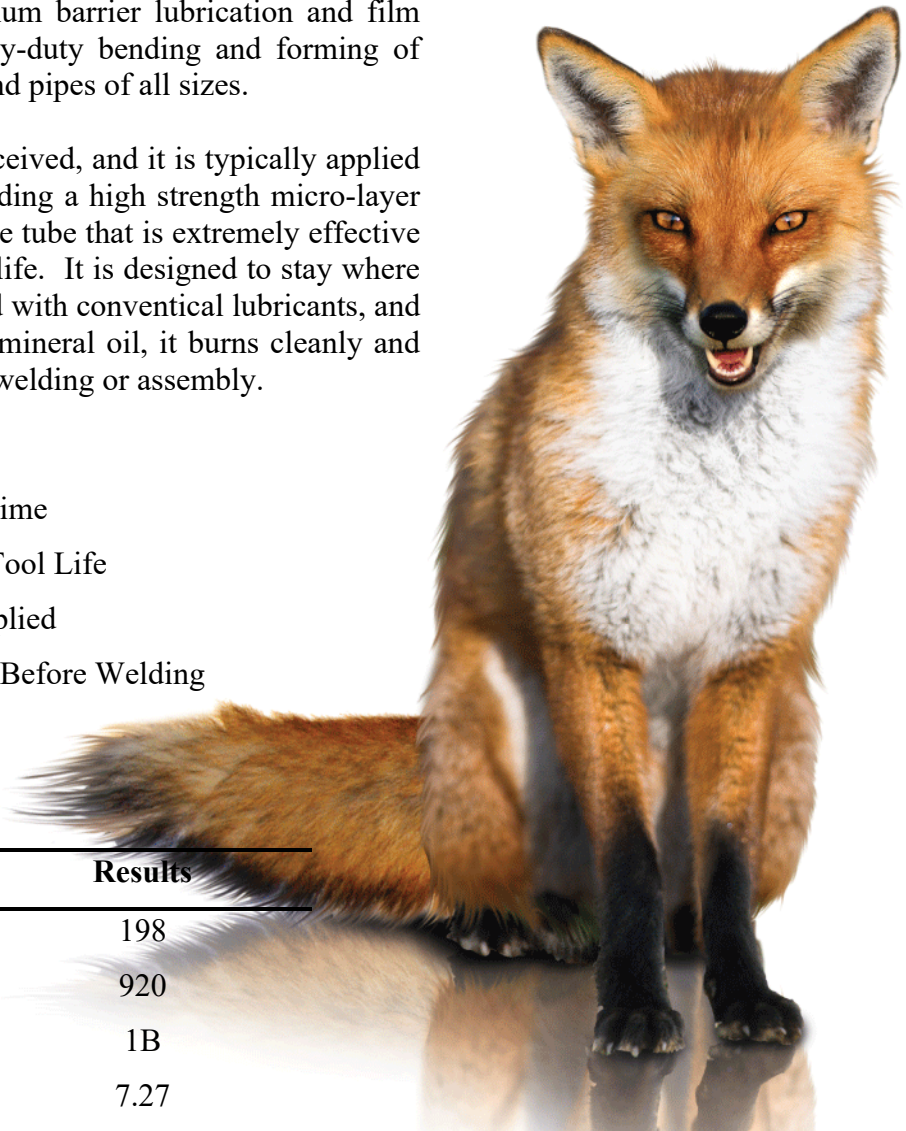

Test	Results
Viscosity @ 40°C, cSt	198
Viscosity @ 100°F, SUS	920
Copper Strip, 30min @ 300°F	1B
Pounds Per Gallon	7.27

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind, expressed or implied, and we assume no responsibility for loss, damage, or expense, direct or consequential, arising out of their use.

PACKAGING

MicroLubricant ML-605 is available in 1-gallon containers, 5-gallon pails, 55-gallon drums and 330-gallon totes.

No one understands micro lubrication better than Metalloid, so no one else can bring you advanced technology that works on the issues that matter to you. Get the whole story by calling Metalloid at **800.686.3201**.



Michigan Facility

1160 White Street
 Sturgis, MI 49091
 telephone 269.503.7300
 facsimile 269.503.7795

Texas Facility

1720 N. Quevado St.
 Jacksonville, TX 75766
 telephone 903.589.3933
 facsimile 903.589.3924

www.metalloidcorp.com/microlubricants